

DATA: 14/10/2022

72S44141006: 4SDPM 4/14C

DATI POMPA E MOTORE




n (rpm):	2900	Fasi motore:	1~
H max (m):	87.00	Un (V):	230
H min (m):	20.00	fn (Hz):	50
Q min (mc/h):	1.50	Poli:	2
Q max (mc/h):	6.00	Max temperatura del liquido (°C):	35
Pn (kW):	1.10	P1 (kW):	1.71 kW
Pn (HP):	1.50	Peso (kg):	14.700
Tipo motore:	IM		

MATERIALI

Camicia esterna:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Diffusore:	Null
Corpo di mandata:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Albero:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)
Lanterna aspirante:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Filtro:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)
Corpo stadio:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Viti:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)
Girante:	Noryl PPO-GF20		

DATA: 14/10/2022

72S44141006: 4SDPM 4/14C

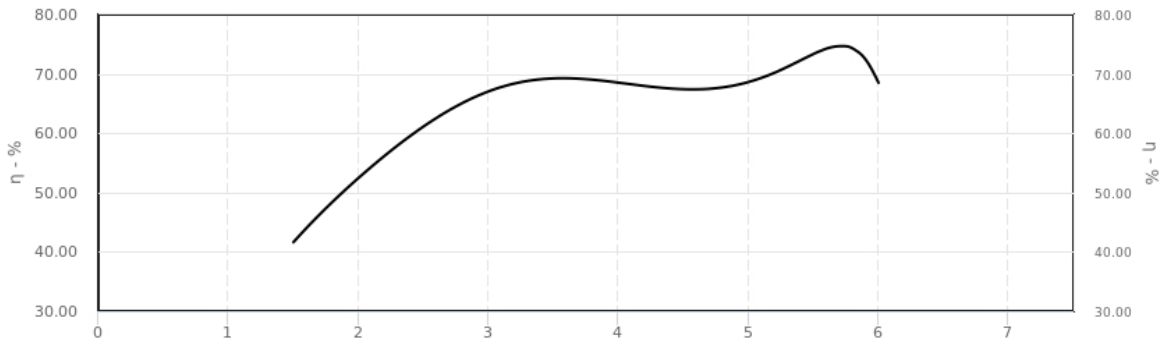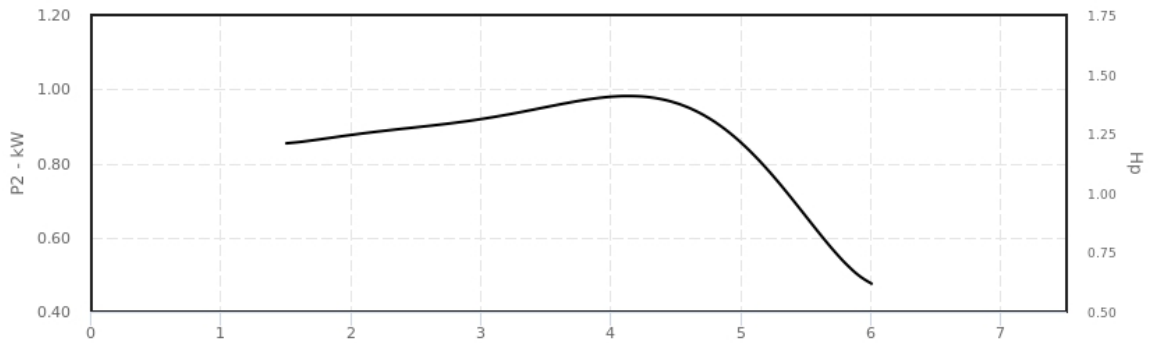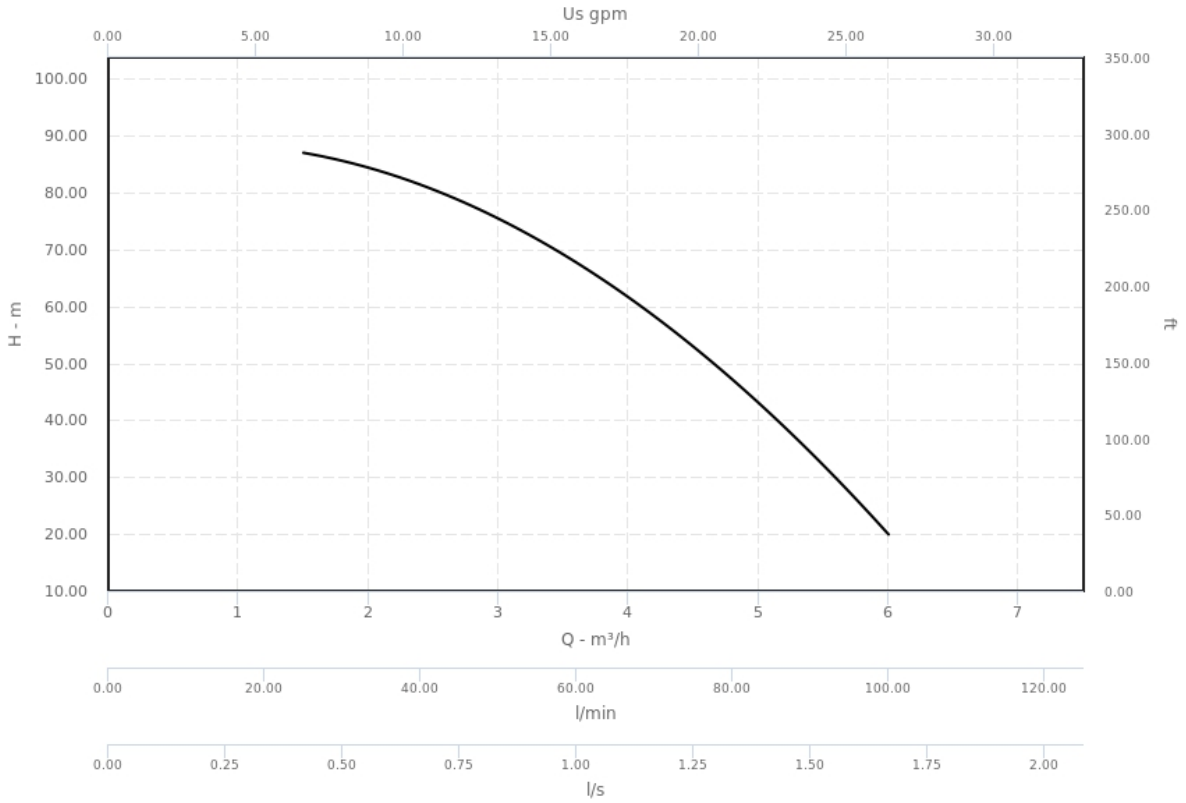

DATA: 14/10/2022

72S44141006: 4SDPM 4/14C

DIMENSIONI (MM)

dn2: Rp 1 1/4"
f: 452.00 mm
fM: 854.00 mm
I5: 98

