


**Caratteristiche**


TIPO	KW (P1) assorb. - input	AMP 400 V.	PREVALENZA (metri) / MT														
			0	1	2	3	4	5	6	7	8	9	10	12	14	16	18
IMM 40/A	0,08	0,23	13	10	5												
IMM 50/A	0,11	0,30	22	16	8												
IMM 63/A	0,30	0,58	98	83	66	56	42	22	2								
IMM 63/B	0,40	0,90	105	95	86	77	68	57	42	27	6						
IMM 71/A	0,53	1,60	198	187	176	167	157	144	133	118	106	90	70	37			
IMM 71/B	0,78	1,90	215	204	198	187	178	170	159	148	136	122	109	77	39		
IMM 80/A	1,15	1,90	283	270	255	244	227	213	198	179	161	144	124	77	29		
IMM 80/B	1,47	2,80	388	383	368	357	345	332	318	304	289	273	254	224	180	127	53
IMM 90/A	1,85	5,00	624	602	565	530	503	471	419	358	265	111	18				
IMM 90/B	2,80	6,20	846	830	793	758	724	683	645	606	567	524	476	387	82		
IMM 100/B	4,80	8,60	1200	1160	1120	1080	1050	1020	975	935	896	850	802	708	625	418	184



Tipo - IMM 71

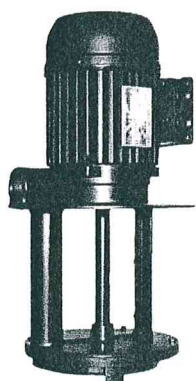

Tipo - IMM 90

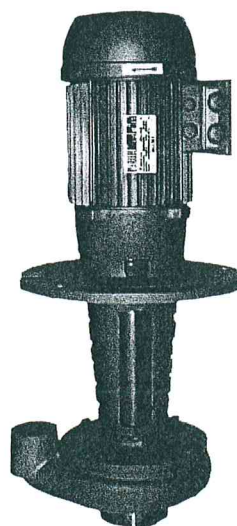

Tipo - AP-320



Tipo - AP-450-960